


Fitting Instructions




Make sure that the hole is cut square and level, and always cut the hole 6mm bigger than the size of the Access Panel.

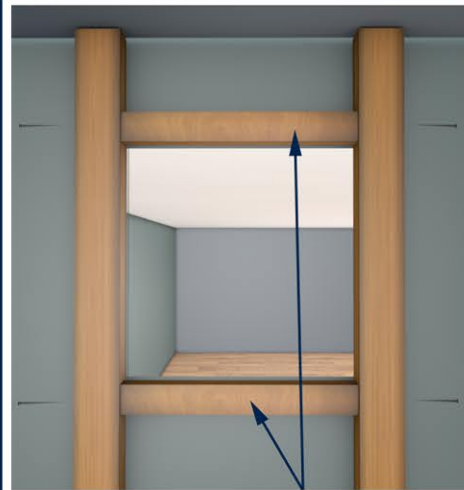

Larger Panels (above 450mm), may require independent bracing especially in the ceiling environment.



Before fitting the Panel remove the door from the Access Panel frame using locating screws.

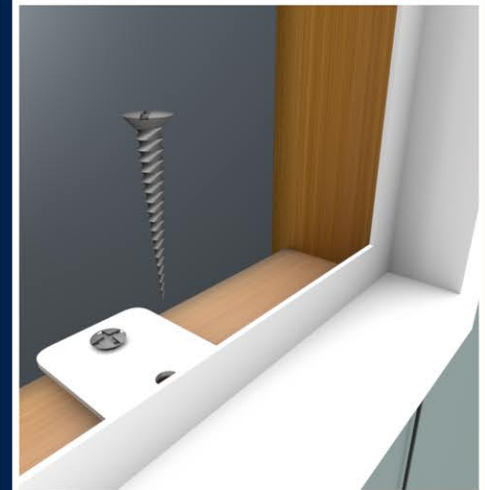

Fit frame to hole and secure by bending back fixing tabs and fixing through. Make sure Panel is square.




If using 'beaded framed' Access Panels make sure to apply scrim tape over bead, and plaster to raised edge.



Refit the door to the frame using the door locating screws and secure using the key provided.



Manuals not for you?
Scan the code above to watch a short video on how to fit this Access Panel.

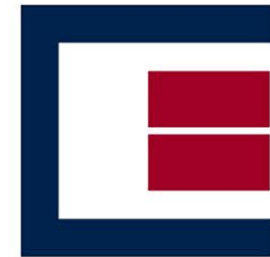

Exitile Access Ltd
William House, Jodrell Street
Nuneaton, Warks
CV11 5EG

Need Help? Call us on 02476 352 771

