


CEILING AND WALL R01-060-PF

NBG

The R01/060/PF range of Access Panels are 1 Hour Fire Rated, are simple to install and suitable for both walls and ceilings. The slim fit frame has been designed to cover Part J of the building regulations, where regular maintenance to services is required.

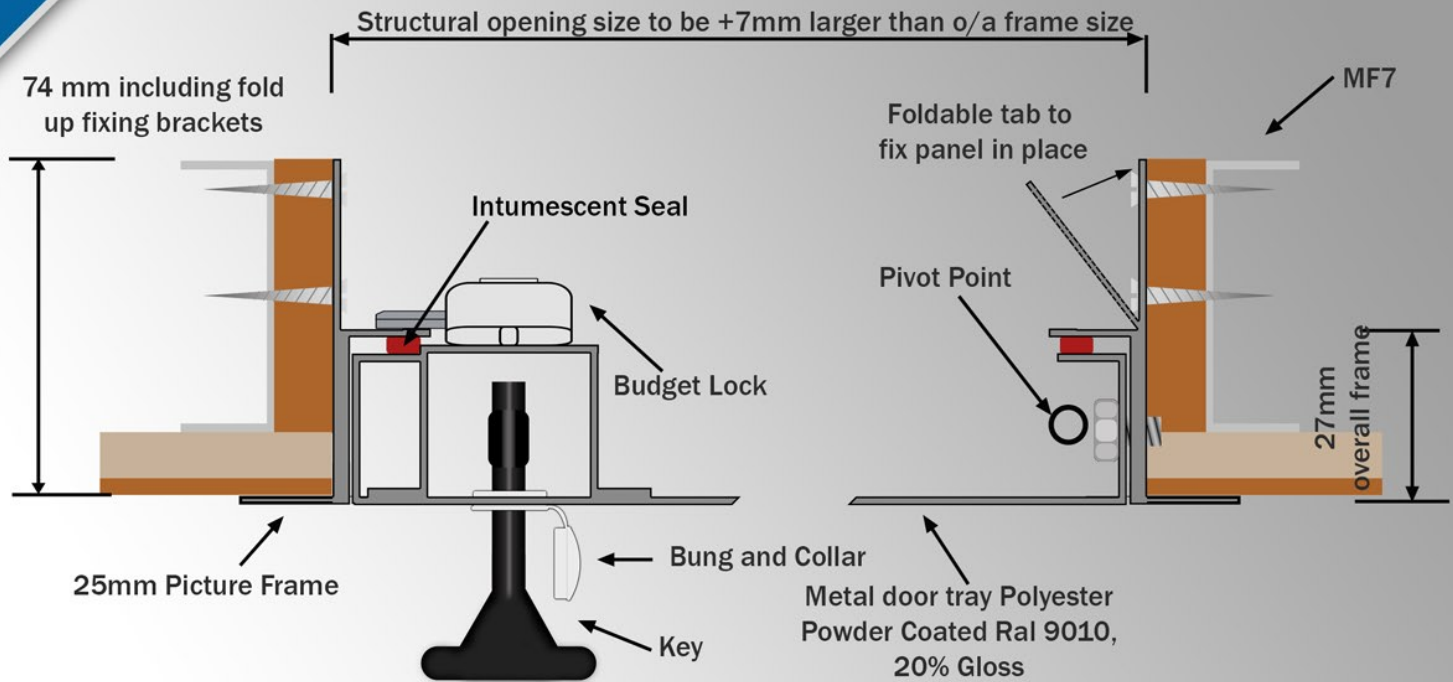

Description

This panel is designed to fit into the structural membrane of a joint-less plasterboard wall or ceiling system. It's manufactured with a 25mm Picture frame, flush metal door and standard budget lock. This panel has a fire rating in accordance with B.S. 476: Part 22:1987.

Construction

The R01/060/PF is manufactured from Zintec steel, has a slim fit frame complete with fold up fixing plates with two fixing holes. The panel has a fully demountable metal faced door and is powder coated RAL 9010 20% gloss (Other colours available). The door is fitted with a screw pin hinge,

Intumescent Strip and lockable with a standard budget lock.

Dimensions (MM)

Stocks sizes;

- 300x300
- 450x450
- 600x600

Bespoke;

- Sizes up to 600x600

Fitting

Make sure the structural opening is at least 7mm larger than the panel, E.G. 600x600 needs to be 607x607. Remove the door the frame and apply fire retardant seal to the back of the frame, place the frame into the set hole.

Bend the fixing tabs back flush to the studding and fix through the appropriate fixing holes, ensure frame is flush to the plasterboard. Check the frame is fitted square by measuring corner to corner, refit the door, and lock with the key provided. This panel can also have a 5mm bit lock, key retaining lock, suited lock or a tamper proof lock.

Part J